

Maximum
transparency,
premium
technology

Table Top Display MTT
2 levels



Modular Table Top Display MTT - The compact solution for hot food-to-go

Maximum transparency for the best view of your food, premium hot holding technology for a long product shelf life and a compact design that fits in anywhere: Meet Fri-Jado's Modular Table Top Display MTT. The MTT is the ideal compact solution to boost your profits from packaged grab-and-go products, while saving up to 50% on energy consumption and costs.

Equipped with premium Hot Blanket holding technology, the MTT keeps your food safe and delicious for longer. A combination of energy efficient hot air recirculation per shelf and mild shelf heating fully encloses the products and keeps them at consistent core temperatures.

The Multi Temp feature of the MTT allows you to set temperatures individually for each shelf, in order to fine-tune the holding conditions for hot products from different food groups.

MTT - Hot Self Serve Open Display

- Heated self serve table top display with 2 levels
- Designed for packaged products
- 600 or 900 mm wide
- Solid back or rear loading model with folding doors on the back
- Transparent design: Food = hero!
- Superior Hot Blanket holding technology extends product shelf life
- Efficient hot air recirculation per shelf - up to 50% energy savings
- Multi Temp feature - each shelf can be set at its own temperature (between 40°C and 70°C)
- LED shelf lighting with natural colour reproduction
- Adjustable top shelf angle
- Total presentation area
 - MTT 60: 0.41 m²
 - MTT 90: 0.66 m²
- Footprint
 - MTT 60: 0.37m²
 - MTT 90: 0.55 m²
- Plug & play - doesn't require installation

Accessories

- Price rail set
- Condiment holder
- Shelf insert tray
- Shelf divider
- Merchandising rack



MTT accessories



Hot Blanket holding technology



Optimal visibility





Solid back or rear loading model



	MTT 60 - 2 level	MTT 90 - 2 level
Width	600 mm	900 mm
Depth	610 mm	610 mm
Height on legs	670 mm	670 mm
Net weight solid back / rear loading	59 kg / 63 kg	79 kg / 85 kg
Voltage	1N~ 230V	1N~ 230V
Frequency	50/60 Hz	50/60 Hz
Power	1.3 kW	1.9 kW

MTT 60

Solid back

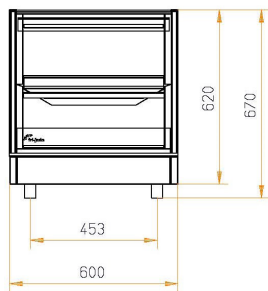
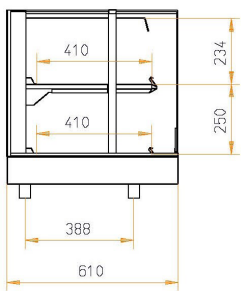


Rear loading



MTT 90

Solid back

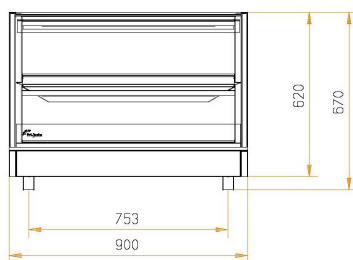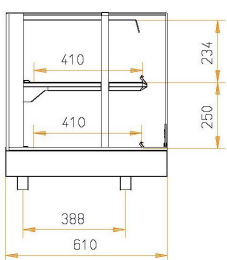

Rear loading

